
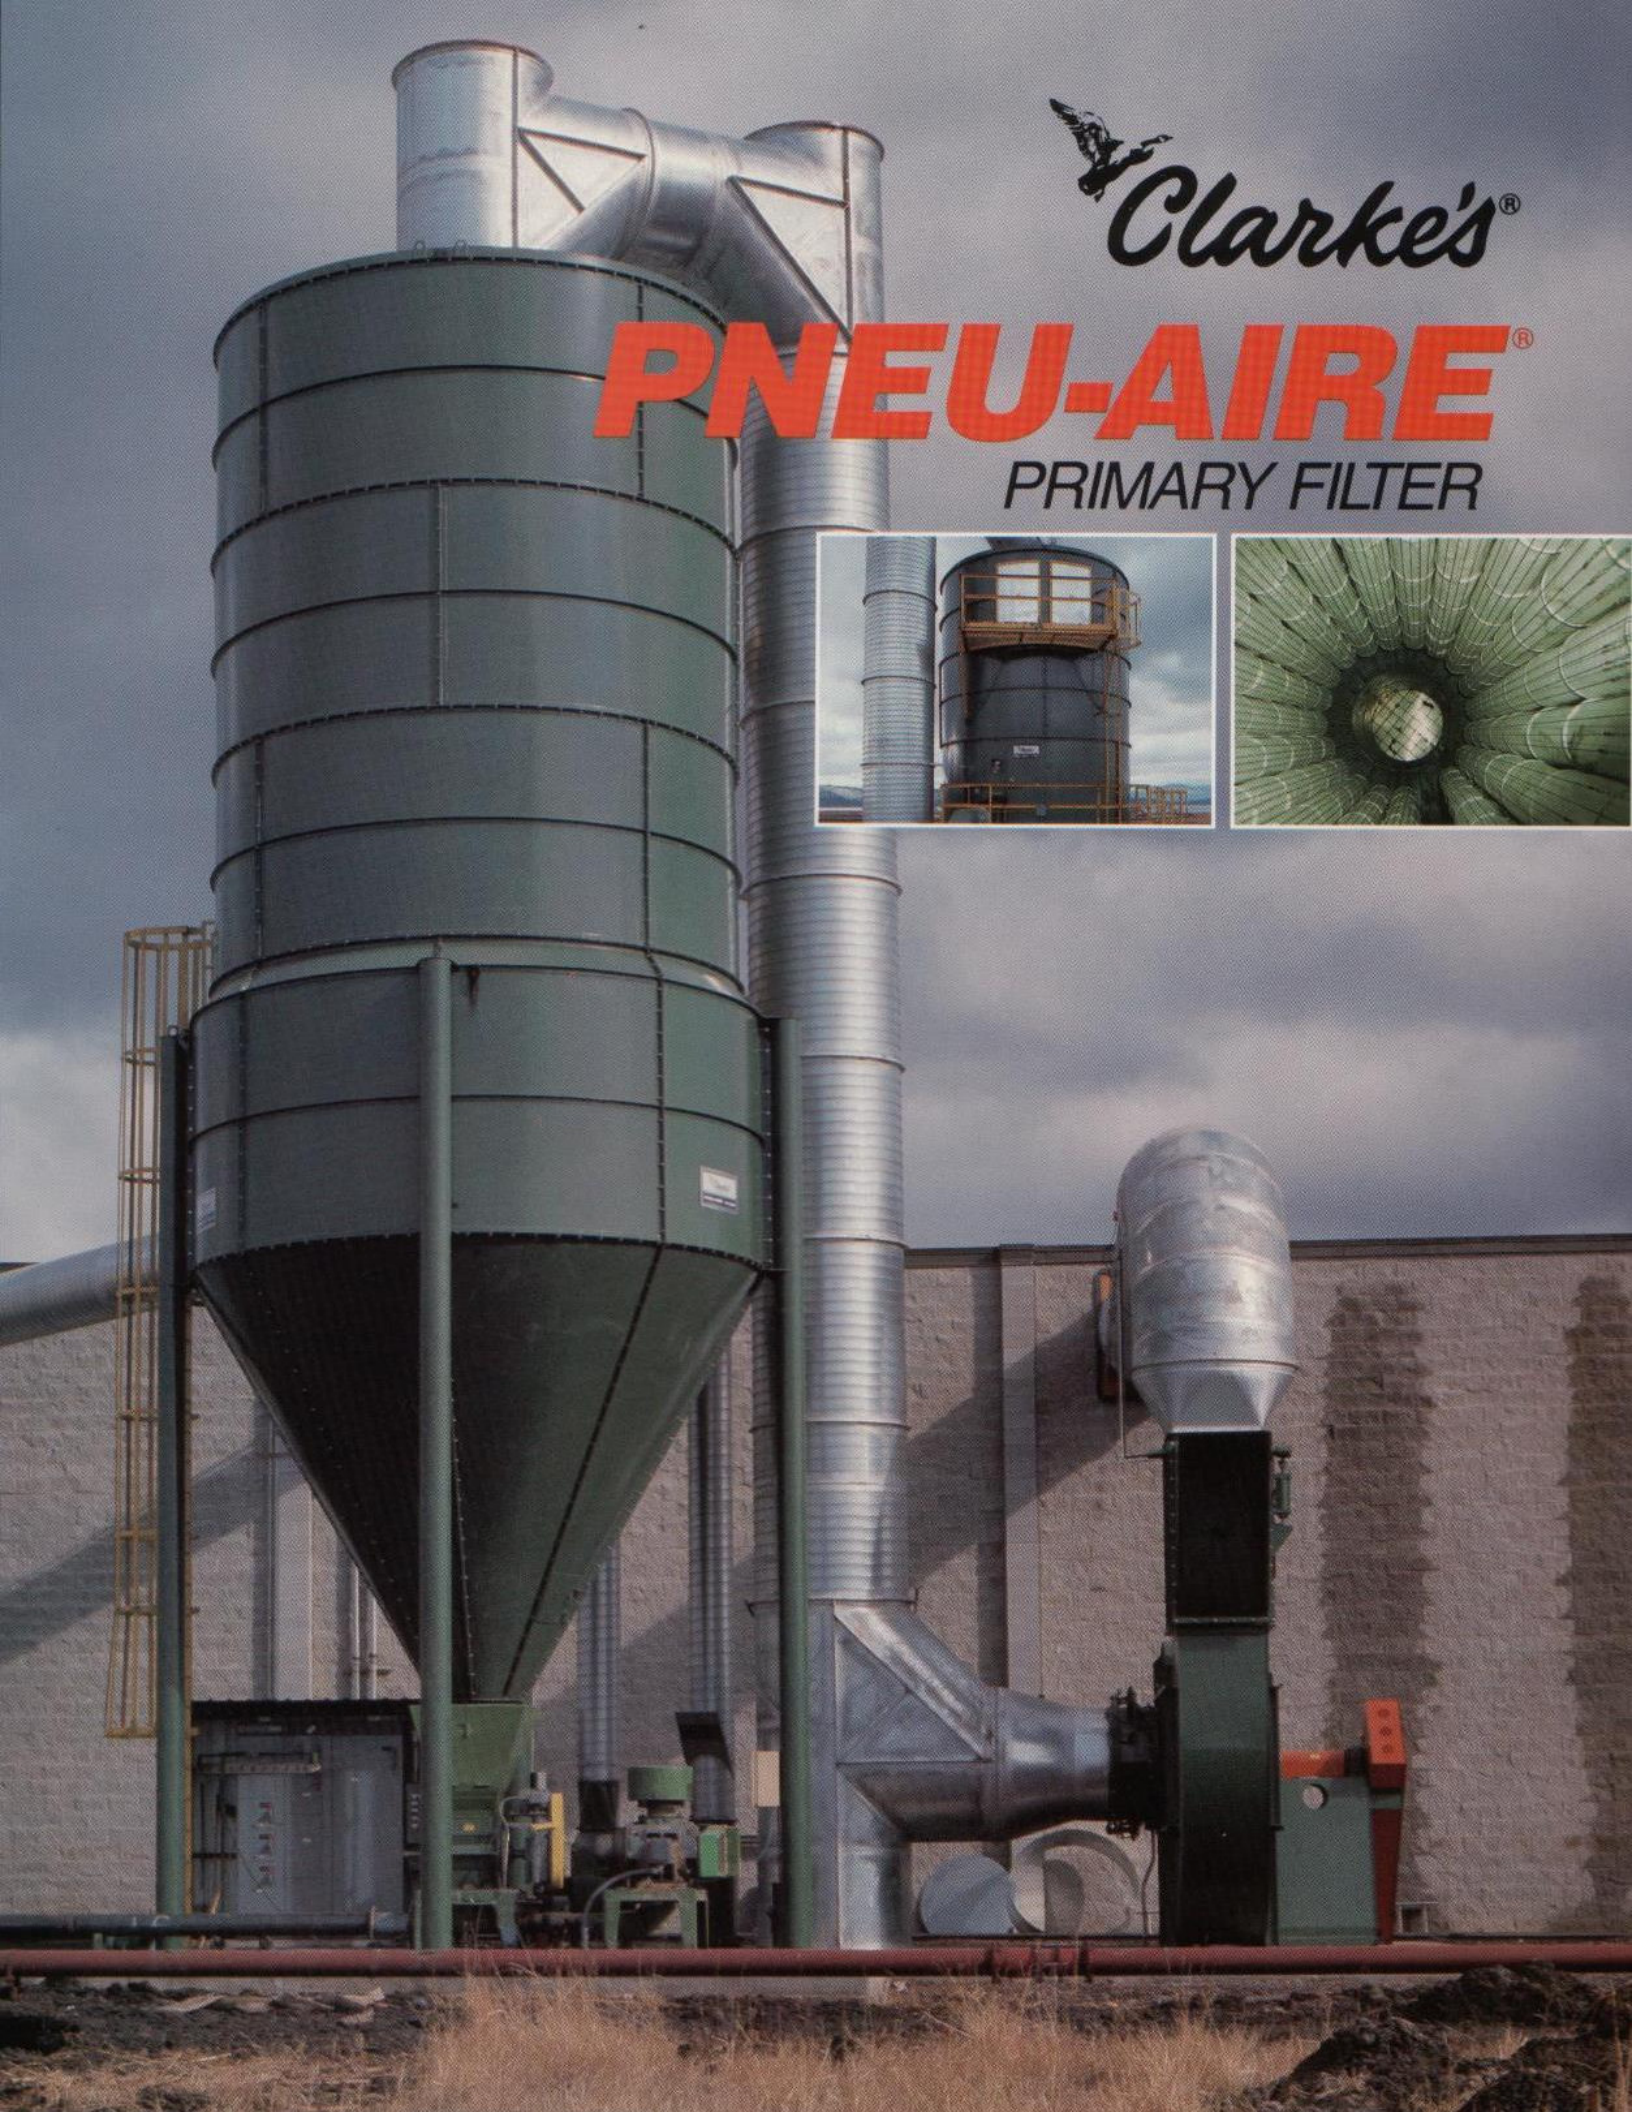


 *Clark's*[®]

PNEU-AIRE[®]


PRIMARY FILTER

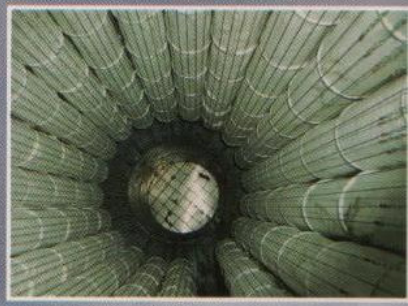

PNEU-AIRE®

PRIMARY FILTER

CLEAN AIR OUTLET

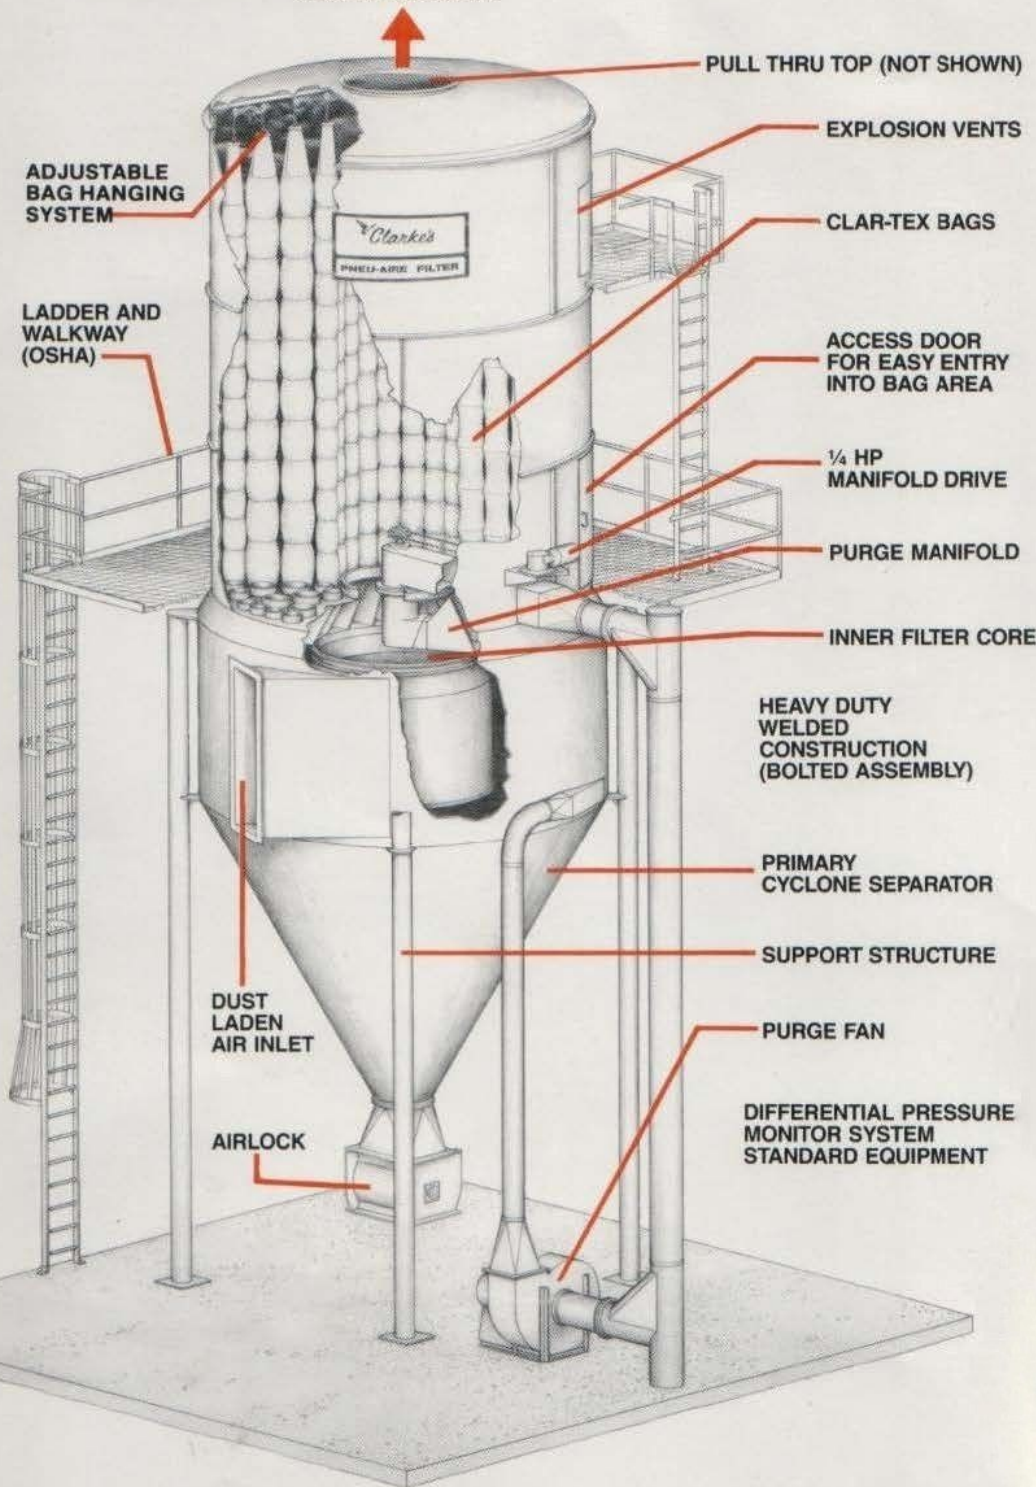

Clarke's unique Primary Pneu-Aire® filter has the same basic design, features and advantages as our popular and successful secondary Pneu-Aire filter. Unlike most primary filters, the dust is contained within the bags and will not bridge between bags. During the cleaning cycle, material is drawn from each individual bag using a reverse flow of air which positively removes dust from within the bag.

The primary Pneu-Aire is available in various sizes with capacities up to 70,000 ACFM at an 8:1 air to cloth ratio and is suitable for either conventional or draw-thru applications.

Give us a call with your application requirements.

Clarke's® Sheet Metal, Inc.
 660 Conger Street • P.O. Box 2428
 Eugene, Oregon USA 97402-0139
 541-343-3395 • FAX 541-345-1447

Clarke's® International, Inc.
 660 Conger Street • P.O. Box 2428
 Eugene, Oregon USA 97402-0139
 541-343-3395 • FAX 541-345-1447

MODEL*	NO. OF BAGS	DIMENSIONS						
		OVERALL HEIGHT	INLET \varnothing HEIGHT	TAILPIPE HEIGHT	AIR OUTLET DIAMETER	TAILPIPE DIAMETER	\varnothing SUPPORT LEGS	AIR INLET
14-20	14	38'-7½"	13'-8"	4'-0"	36" ϕ	12" ϕ	10'-6"	16" x 34"
38-20	38	43'-2½"	17'-4"	5'-0"	48" ϕ	18" ϕ	12'-9⅝"	24" x 54"
57-20	57	49'-6½"	22'-9"	7'-0"	60" ϕ	24" ϕ	17'-0¾"	33" x 72"
95-20	95	53'-0"	25'-7½"	8'-0"	60" ϕ	30" ϕ	19'-1¾"	36" x 84"

* ALSO AVAILABLE IN "GEMINI" SERIES - DIMENSIONS SUBJECT TO CHANGE WITHOUT NOTICE